


- Features:**
- Broad Seal range
 - Moderate density and yield
 - Out standing opacity to prevent product show - through
 - Excellent stiffness and Gloss
 - Good moisture barrier

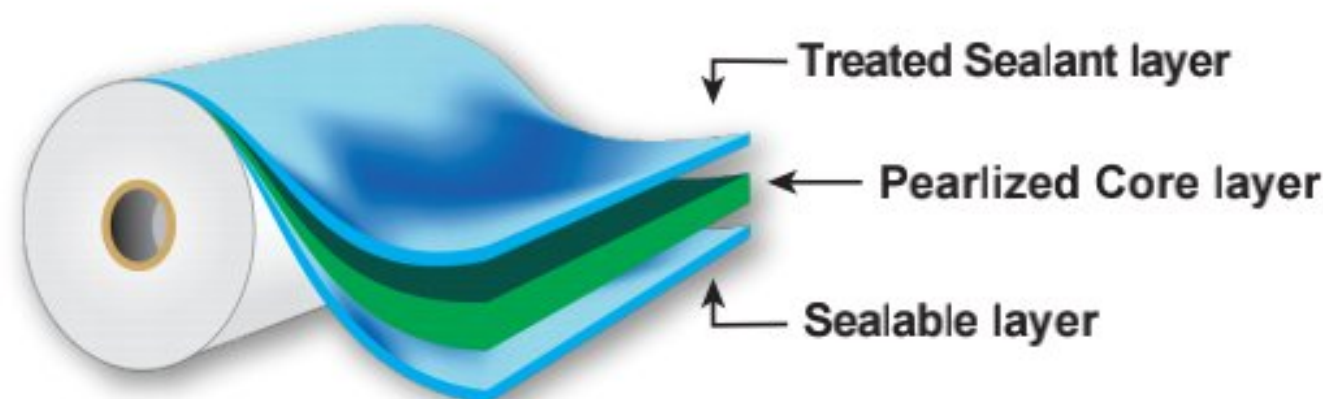

Application: General purpose, heat sealable pearlized film for ice cream, wafers, snacks, biscuits packaging etc. Where improved stiffness is required for better Machinability.

Properties	Test Method	Units	Results		
Thickness	ASTM F2251	micron	30	35	40
Yield	ASTM D4321	m ² /Kg	47.6	40.8	35.7
Gloss (85°)	ASTM D2457	%	65		
Opacity	DIN 35146	%	70	75	78
Tensile Strength At Break	ASTM D882	MD	100		
		TD	200		
Elongation At Break	ASTM D882	MD	160		
		TD	40		
Thermal Shrinksge (120 °C , 5 min)	ASTM D1204	MD	≤ 4		
		TD	≤ 2		
Coefficient Of Friction	ASTM D1894	B/B	≤ 0.35		
Surface Tension	ASTM D2578	Dyne/cm	≥ 38		
HeatSeal Range	ASTM F88	°C	105-145° C		
** HeatSeal Strength (130°C ,3 Bar,0.5 Sec)	ASTM F88	N/15mm	2		

Thickness , Yield : ± 2.5 % MD: Machine Direction TD: Transverse Direction B/B : Back to Back (Film to Film) **(Seal strength = 100 grf/cm)

The information contained in this data sheet is true and accurates according to current state of our knowledge and to be considered as guidelines and not as product specifications.

Since the actual conditions of use are beyond our control, users are advised to make own tests at their specific conditions of laboratory and/or actual use.

FILMTECH strongly suggests that before any vast usage, please take a sample of our produts in limit amounts.

Central office:
No. 402 ,4th floor, Aysun Building,
Near the 1st street, 2nd Square,
Shahran, Tehran, Iran
Postal code: 1478655141
www.filmtech.webexir.com